

Condensing Unit Technical Data Sheet

Model CGLY12RRa_N
Voltage 115-127V 60Hz ~1
Refrigerant R134a

APPLICATION

Application High-Medium Back Pressure
 Refrigerant R134a
 Evaporating Temp. -25,0 °C to 10,0 °C
 Expansion Capillar/Valve
 Comp. Cooling Fan cooled
 Max. ambient temp. 43,0 °C

COMPRESSOR

Displacement 10,70 cm³
 Diameter 25,40 mm
 Stroke 21,12 mm
 Oil type ISO VG 32 ESTER
 Oil charge 345 cm³

MOTOR

Nominal Power 3/8 hp
 Voltage/Frequency 115-127V 60Hz
 Voltage range 98-140 V
 Type CSIR
 Phase number 1 PH
 Locked Rotor Amps (LRA) 36,00 A
 Max. Cont. Current (MCC) 8,20 A
 Main W. resist. at 25°C 1,27 Ω
 Start W. resist. at 25°C 8,47 Ω

NOMINAL PERFORMANCE

Cooling Capacity	1.265 W
COP	1,94 W/W
EER	1,67 kCal/Wh
Input Power	651 W
Current	7,01 A

ASHRAE


TEST CYCLE CONDITIONS

	HMBP
Evaporating temp. (T _e)	7,2 °C
Condensing temp. (T _c)	55,0 °C
Liquid temp. (T _{liq.})	46,0 °C
Ambient temp. (T _{amb.})	35,0 °C
Suction temp. (T _{suction})	35,0 °C
Voltage/Frequency	115 V 60 Hz

CONDENSER AND FAN DATA

Condenser type	CU-AL
Condenser model	9T 3R
Fan blade (Ø mm / °)	230 / 28
Fan motor	11W 115V 60Hz

WIRING DIAGRAM

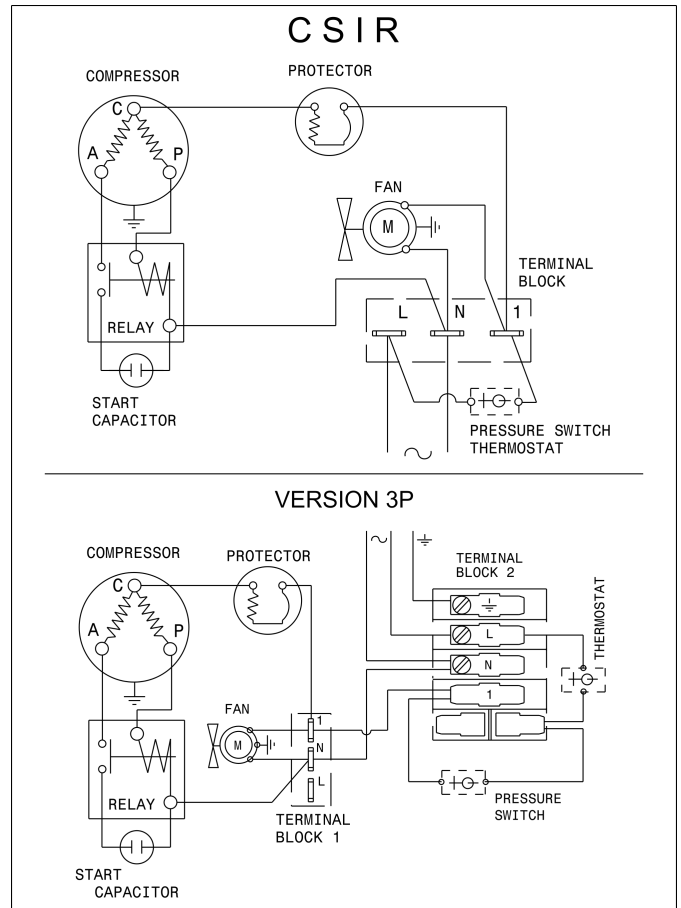

REFRIGERATION CAPACITY (W) Evaporating Temperature (°C)

Model	Motor	-25	-15	-5	5	7.2			10
						W	Winp	A	
CGLY12RRa_N	CSIR	316	531	818	1177	1265	651	7.01	1382


ASHRAE HMBP: Condensing temperature: 55°C, Liquid temperature: 46°C, Suction temperature: 35°C, Ambient temperature: 35°C

Condensing Unit Technical Data Sheet

VERSIONS

VERSION 1	VERSION 2	VERSION 3	VERSION 3P	VERSION 4
Tube	Service valve	Service valve and receiver	Service valve, receiver, pressure switch	Schrader valve on the service port
Suction tube internal diam.: 8,1 mm Discharge tube internal diam.: 6,5 mm Net Weight: 20,4 Kg	Suction valve: 3/8" Discharge valve: 1/4" Net Weight: 20,9 Kg	Receiver vol.: 0,0 l Suction valve: 3/8" Discharge valve: 1/4" Net Weight: 21,2 Kg	Receiver vol.: 0,0 l Suction valve: 3/8" Discharge valve: 1/4" Net Weight: 22,3 Kg	Suction tube internal diam.: 8,1 mm Discharge tube internal diam.: 6,5 mm Net Weight: 20,4 Kg

DIMENSIONS (Version 3 drawing)

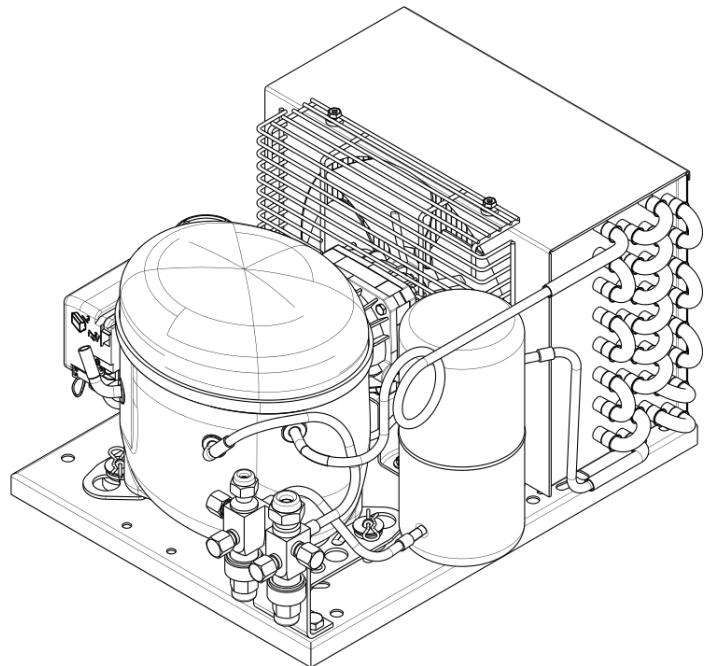

VERSION 1-4 (WxLxH) (mm)	VERSION 2 (WxLxH) (mm)	VERSION 3 (WxLxH) (mm)	VERSION 3P (WxLxH) (mm)
345x385x275	345x425x275	345x385x275	350x435x275